

Introduction

1. Introduction
2. Why Study Data Structures and Abstract Data Types?
3. Getting Started with Data
4. Review of Programming
5. Review of OOP

1.1~1.4 Introduction

Given a problem, a computer scientist's goal is to develop an algorithm, **a step-by-step list of instructions for solving any instance of the problem that might arise.** Algorithms are finite processes that if followed will solve the problem.

Given a problem, a computer scientist's goal is to develop an algorithm, a **step-by-step list of instructions for solving any instance of the problem that might arise**. Algorithms are finite processes that if followed will solve the problem.



source: <https://www.owkin.com/a-z-of-ai-for-healthcare/algorithm>

Given a problem, a computer scientist's goal is to develop an algorithm, a **step-by-step list of instructions for solving any instance of the problem that might arise**. Algorithms are finite processes that if followed will solve the problem.



source: <https://www.owkin.com/a-z-of-ai-for-healthcare/algorithm>

It is very common to include the word computable when describing problems and solutions. We say that a problem is computable if an algorithm exists for solving it. A definition for computer science is to study the problems that are and that are not computable!

Computer science is also the study of abstraction. Abstraction allows us to view the problem and solution in such a way as to separate the so-called logical and physical perspectives.

Computer science is also the study of abstraction. Abstraction allows us to view the problem and solution in such a way as to separate the so-called logical and physical perspectives.

For instance, you are using the functions provided by the vehicle designers for the purpose of transporting you from one location to another. These functions are sometimes also referred to as the interface.

As another example of abstraction, consider the `Python` `math` module. Once we import the module, we can perform computations such as

As another example of abstraction, consider the `Python` `math` module. Once we import the module, we can perform computations such as

```
In [2]: import math  
  
        math.sqrt(16)
```


```
Out[2]: 4.0
```

As another example of abstraction, consider the Python `math` module. Once we import the module, we can perform computations such as

```
In [2]: import math  
  
        math.sqrt(16)
```

```
Out[2]: 4.0
```

This is an example of procedural abstraction.




Programming is the process of encoding an algorithm into a programming language, so that it can be executed by a computer. Programming languages must provide ways to represent both the *process* and the *data* which is known as control constructs and data types.

Programming is the process of encoding an algorithm into a programming language, so that it can be executed by a computer. Programming languages must provide ways to represent both the *process* and the *data* which is known as control constructs and data types.

Control constructs allow algorithmic steps to be represented in a convenient yet unambiguous way.

Programming is the process of encoding an algorithm into a programming language, so that it can be executed by a computer. Programming languages must provide ways to represent both the *process* and the *data* which is known as control constructs and data types.

Control constructs allow algorithmic steps to be represented in a convenient yet unambiguous way.

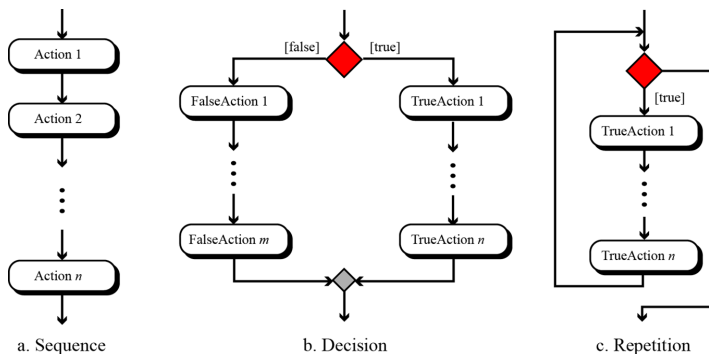

We give the formal definition of algorithm here:

1. **Well-Defined:** An algorithm must be a well-defined, ordered set of instructions.
2. **Unambiguous steps:** If one step is to add two integers, we must define both 'integers' as well as the 'add' operation

We give the formal definition of algorithm here:

1. **Well-Defined:** An algorithm must be a well-defined, ordered set of instructions.
2. **Unambiguous steps:** If one step is to add two integers, we must define both 'integers' as well as the 'add' operation
3. **Produce a result:** An algorithm must produce a result. The result can be data returned or some other effect (for example, printing).
4. **Terminate in a finite time:** An algorithm must terminate. If it does not, we have not created an algorithm!


```
In [3]: display_quiz(path+"algo.json", question_alignment='center', max_width=800)
```

Which one is the definition of an algorithm?

It must be decribed using programming language.

A step-by-step list of instructions for solving any instance of the problem that might arise

It contains well-defined, unambiguous steps and must procude result in a finite time.

A special kind of notation used to describe how to solve a problem.

1.5 Why Study Data Structures and Abstract Data Types?


The data abstraction share a similar idea with procedure abstraction. An abstract data type, sometimes abbreviated ADT, is a logical description of how we view the data and the operations that are allowed without regard to how they will be implemented.

The data abstraction share a similar idea with procedure abstraction. An abstract data type, sometimes abbreviated ADT, is a logical description of how we view the data and the operations that are allowed without regard to how they will be implemented.

By providing this level of abstraction, we are creating an encapsulation around the data. The idea is that by encapsulating the details of the implementation, we are hiding them from the user's view.

The data abstraction share a similar idea with procedure abstraction. An abstract data type, sometimes abbreviated ADT, is a logical description of how we view the data and the operations that are allowed without regard to how they will be implemented.

By providing this level of abstraction, we are creating an encapsulation around the data. The idea is that by encapsulating the details of the implementation, we are hiding them from the user's view.



The implementation of an abstract data type, often referred to as a data structure, will require that we provide a physical view of the data using some collection of programming constructs and primitive data types.

The implementation of an abstract data type, often referred to as a data structure, will require that we provide a physical view of the data using some collection of programming constructs and primitive data types.

The separation of these two perspectives will allow us to provide an implementation-independent view of the data.

The implementation of an abstract data type, often referred to as a data structure, will require that we provide a physical view of the data using some collection of programming constructs and primitive data types.

The separation of these two perspectives will allow us to provide an implementation-independent view of the data.

There will usually be many different ways to implement an abstract data type and the user can remain focused on the problem-solving process.

1.6 Why Study Algorithms?

Being exposed to different problem-solving techniques and seeing how different algorithms are designed to help us. We can then begin to develop pattern recognition so that the next time a similar problem arises, we are better able to solve it!

Being exposed to different problem-solving techniques and seeing how different algorithms are designed to help us. We can then begin to develop pattern recognition so that the next time a similar problem arises, we are better able to solve it!

On the other hand, it is entirely possible that there are many different ways to implement the details to algorithm. One algorithm may use many fewer resources than another. We would like to have some way to compare these solutions. Even though they both work, one is perhaps "better" than the other.

As we study algorithms, we can learn analysis techniques that allow us to compare and contrast solutions based solely on their own characteristics, not the characteristics of the program or computer used to implement them.

As we study algorithms, we can learn analysis techniques that allow us to compare and contrast solutions based solely on their own characteristics, not the characteristics of the program or computer used to implement them.

There will often be trade-offs that we will need to identify and decide upon. As computer scientists, in addition to our ability to solve problems, we will also need to know and **understand solution evaluation techniques.**

1.8 Getting Started with Data

In `Python`, as well as in any other *object-oriented programming* language, we define a class to be a description of what the data look like (the state) and what the data can do (the behavior).

In `Python`, as well as in any other *object-oriented programming* language, we define a class to be a description of what the data look like (the state) and what the data can do (the behavior).

Classes are analogous to abstract data types because a user of a class only sees the state and behavior of an objects in the object-oriented paradigm. An object is an instance of a class.

1.8.1 Built-in Atomic Data Types

Python has two main built-in numeric classes that implement the integer and floating-point data types. These Python classes are called `int` and `float`. The standard arithmetic operators, `+`, `-`, `*`, `/`, `%` (modulo), `//` (integer division) and `**` (exponentiation), can be used:

Python has two main built-in numeric classes that implement the integer and floating-point data types. These Python classes are called `int` and `float`. The standard arithmetic operators, `+`, `-`, `*`, `/`, `%` (modulo), `//` (integer division) and `**` (exponentiation), can be used:

In [4]:

```
print(2 + 3 * 4)
print((2 + 3) * 4)
print(2 ** 10)
print(6 / 3)
print(7 / 3)
print(7 // 3)
print(7 % 3)
print(2 ** 100)
```

14

20

1024

2.0

2.3333333333333335

2

1

1267650600228229401496703205376

In [5]: `display_quiz(path+"type.json", max_width=800)`

What value is printed when the following statement executes?

```
print(18.0 // 4)
```

4

4.5

5

4.0

In [6]: `display_quiz(path+"ex_type.json", max_width=800)`

What value is printed when the following statement executes?

```
print(int(53.785))
```

Nothing is printed. It generates a runtime error.

53.785

54

53

The Boolean data type, implemented as the `Python bool` class, will be quite useful for representing truth values. The possible state values for a Boolean object are `True` and `False` with the standard Boolean operators, `and`, `or`, and `not`.

The Boolean data type, implemented as the Python `bool` class, will be quite useful for representing truth values. The possible state values for a Boolean object are `True` and `False` with the standard Boolean operators, `and`, `or`, and `not`.

```
In [7]: print(False or True)
        print(not (False or True))
        print(True and True)
```

```
True
False
True
```

The Boolean data type, implemented as the Python `bool` class, will be quite useful for representing truth values. The possible state values for a Boolean object are `True` and `False` with the standard Boolean operators, `and`, `or`, and `not`.

```
In [7]: print(False or True)
        print(not (False or True))
        print(True and True)
```

```
True
False
True
```

Boolean data objects are also used as results for comparison operators such as equality (`==`) and greater than (`>`). The table below shows the *relational* and *logical* operators.

Operation Name	Operator	Explanation
less than	<	Less than operator
greater than	>	Greater than operator
less than or equal	<=	Less than or equal to operator
greater than or equal	>=	Greater than or equal to operator
equal	==	Equality operator
not equal	!=	Not equal operator
logical and	and	Both operands True for result to be True
logical or	or	One or the other operand is True for the result to be True
logical not	not	Negates the truth value, False becomes True, True becomes False

In [8]:

```
print(5 == 10)
print(10 > 5)
print((5 >= 1) and (5 <= 10))
print((1 < 5) or (10 < 1))
print(1 < 5 < 10)
```

False

True

True

True

True

In [9]: `display_quiz(path+"logical.json", max_width=800)`

What is the correct Python expression for checking to see if a number stored in a variable `x` is between 0 and 5.

`x > 0 and x < 5`

`x > 0 and < 5`

`x > 0 or x < 5`

`0 < x < 5`

Identifiers are used in programming languages as names. In `Python`, identifiers start with a letter or an underscore (`_`), are **case sensitive**, and can be of any length.

Identifiers are used in programming languages as names. In `Python`, identifiers start with a letter or an underscore (`_`), are **case sensitive**, and can be of any length.

A `Python` variable is created when a name is used for the first time on the left-hand side of an assignment statement. Assignment statements provide a way to **associate a name with a value**. The variable will hold a **reference** to a piece of data but not the data itself.

Identifiers are used in programming languages as names. In `Python`, identifiers start with a letter or an underscore (`_`), are **case sensitive**, and can be of any length.

A `Python` variable is created when a name is used for the first time on the left-hand side of an assignment statement. Assignment statements provide a way to **associate a name with a value**. The variable will hold a **reference** to a piece of data but not the data itself.

In [10]:

```
the_sum = 0
print(the_sum)

the_sum = the_sum + 1
print(the_sum)

the_sum = True
print(the_sum)
```

0

1

True

The assignment statement `the_sum = 0` creates a variable and lets it hold the reference to the data object 0.




The assignment statement `the_sum = 0` creates a variable and lets it hold the reference to the data object 0.




At this point in our example, the type of the variable is integer as that is the type of the data currently being referred to by `the_sum`.

If the type of the data changes, as shown above with the Boolean value `True`, so does the type of the variable (`the_sum` is now of the type Boolean).



If the type of the data changes, as shown above with the Boolean value `True`, so does the type of the variable (`the_sum` is now of the type Boolean).



The assignment statement changes the reference being held by the variable. This is a dynamic characteristic of `Python`. The same variable can refer to many different types of data.

In [11]: `display_quiz(path+"assignment.json", max_width=800)`

What is printed when the following statements execute?

```
day = "Thursday"  
day = 32.5  
day = 19  
print(day)
```

Thursday

19

Nothing is printed. A runtime error occurs.

32.5

1.8.2. Built-in Collection Data Types

Python has a number of very powerful built-in collection classes. `Lists`, `strings`, and `tuples` are ordered collections (sequence) that are very similar in general structure. `Sets` and `dictionaries` are unordered collections.

Python has a number of very powerful built-in collection classes. `Lists`, `strings`, and `tuples` are ordered collections (sequence), that are very similar in general structure. `Sets` and `dictionaries` are unordered collections.

A `list` is an ordered collection of zero or more references to `Python` data objects. Lists are heterogeneous, meaning that the data objects need not all be from the same class and the collection can be assigned to a variable as below.

Python has a number of very powerful built-in collection classes. `Lists`, `strings`, and `tuples` are ordered collections (sequence) that are very similar in general structure. `Sets` and `dictionaries` are unordered collections.

A `list` is an ordered collection of zero or more references to `Python` data objects. Lists are heterogeneous, meaning that the data objects need not all be from the same class and the collection can be assigned to a variable as below.

```
In [12]: my_list = [1, 3, True, 6.5]
         my_list
```

```
Out[12]: [1, 3, True, 6.5]
```

Since `lists` are considered to be sequentially ordered, they support a number of operations that can be applied to any `Python` sequence.

Operation Name	Operator	Explanation
indexing	[]	Access an element of a sequence
concatenation	+	Combine sequences together
repetition	*	Concatenate a repeated number of times
membership	in	Ask whether an item is in a sequence
length	len	Ask the number of items in the sequence
slicing	[:]	Extract a part of a sequence

Operation Name	Operator	Explanation
indexing	[]	Access an element of a sequence
concatenation	+	Combine sequences together
repetition	*	Concatenate a repeated number of times
membership	in	Ask whether an item is in a sequence
length	len	Ask the number of items in the sequence
slicing	[:]	Extract a part of a sequence

Note that the indices for `lists` **start counting with 0**. The slice operation `my_list[1:3]` returns a list of items starting with the item indexed by 1 up to—but not including—the item indexed by 3.

Lists support a number of methods that will be used to build data structures.

Lists support a number of methods that will be used to build data structures.

Method Name	Use	Explanation
append	<code>a_list.append(item)</code>	Adds a new item to the end of a list
insert	<code>a_list.insert(i,item)</code>	Inserts an item at the ith position in a list
pop	<code>a_list.pop()</code>	Removes and returns the last item in a list
pop	<code>a_list.pop(i)</code>	Removes and returns the ith item in a list
sort	<code>a_list.sort()</code>	Sorts a list in place
reverse	<code>a_list.reverse()</code>	Modifies a list to be in reverse order
del	<code>del a_list[i]</code>	Deletes the item in the ith position
index	<code>a_list.index(item)</code>	Returns the index of the first occurrence of item
count	<code>a_list.count(item)</code>	Returns the number of occurrences of item
remove	<code>a_list.remove(item)</code>	Removes the first occurrence of item

```
In [13]: my_list = [1024, 3, True, 6.5]
my_list.append(False)
print(my_list)
my_list.insert(2,4.5)
print(my_list)
print(my_list.pop())
print(my_list)
print(my_list.pop(1))
print(my_list)
my_list.pop(2)
print(my_list)
```

```
[1024, 3, True, 6.5, False]
[1024, 3, 4.5, True, 6.5, False]
False
[1024, 3, 4.5, True, 6.5]
3
[1024, 4.5, True, 6.5]
[1024, 4.5, 6.5]
```

```
In [14]: my_list.sort()
print(my_list)
my_list.reverse()
print(my_list)
print(my_list.count(6.5))
print(my_list.index(4.5))
my_list.remove(6.5)
print(my_list)
del my_list[0]
print(my_list)
```

```
[4.5, 6.5, 1024]
[1024, 6.5, 4.5]
1
2
[1024, 4.5]
[4.5]
```

You can see that some of the methods, such as `pop()`, return a value and also modify the `list`. Others, such as `reverse()`, simply modify the `list` with no return value. You should also notice the familiar "dot" notation for asking an object to invoke a method.

You can see that some of the methods, such as `pop()`, return a value and also modify the `list`. Others, such as `reverse()`, simply modify the `list` with no return value. You should also notice the familiar "dot" notation for asking an object to invoke a method.

In fact, even simple data objects such as integers can invoke methods in this way.

You can see that some of the methods, such as `pop()`, return a value and also modify the `list`. Others, such as `reverse()`, simply modify the `list` with no return value. You should also notice the familiar "dot" notation for asking an object to invoke a method.

In fact, even simple data objects such as integers can invoke methods in this way.

```
In [15]: (54).__add__(21) # Equal to 54+21
```

```
Out[15]: 75
```

One common `Python` function that is often discussed in conjunction with `lists` is the `range()` function. `range()` produces a `range` object that represents a sequence of values.

One common Python function that is often discussed in conjunction with lists is the `range()` function. `range()` produces a `range` object that represents a sequence of values.

```
In [16]: print(range(10))
print(list(range(10)))
print(range(5, 10))
print(list(range(5, 10)))
print(list(range(5, 10, 2)))
print(list(range(10, 1, -1)))
```

```
range(0, 10)
[0, 1, 2, 3, 4, 5, 6, 7, 8, 9]
range(5, 10)
[5, 6, 7, 8, 9]
[5, 7, 9]
[10, 9, 8, 7, 6, 5, 4, 3, 2]
```

In [17]: `display_quiz(path+"slice.json", max_width=800)`

What is printed by the following statements?

```
alist = [3, 67, "cat", [56, 57, "dog"], 2.5, 3.14, False]
print(alist[4:])
```

2.5

[[56, 57, "dog"], 2.5, 3.14, False]

[2.5, 3.14]

[2.5, 3.14, False]

Strings are sequential collections of zero or more letters, numbers, and other symbols. Literal string values are differentiated from identifiers by using quotation marks (either single or double):

Strings are sequential collections of zero or more letters, numbers, and other symbols. Literal string values are differentiated from identifiers by using quotation marks (either single or double):

```
In [18]: print("David")
          print('David')
          my_name = "David"
          print(my_name[3])
          print(my_name * 2)
          print(len(my_name))
```

```
David
David
i
DavidDavid
5
```

A major difference between `lists` and `strings` is that `lists` can be modified while `strings` cannot. This is referred to as mutability. `Lists` are mutable; `strings` are immutable.

A major difference between `lists` and `strings` is that `lists` can be modified while `strings` cannot. This is referred to as mutability. `Lists` are mutable; `strings` are immutable.

In [20]:

```
print(my_list)
my_list[0] = 2 ** 10
print(my_list)

print(my_name)
my_name[0] = "X"
```

```
[4.5]
[1024]
David
```

```
-----
-----
TypeError                                Traceback (most recent call
last)
~\AppData\Local\Temp\ipykernel_67152\1799471016.py in <module>
      4
      5 print(my_name)
----> 6 my_name[0] = "X"

TypeError: 'str' object does not support item assignment
```


Tuples are very similar to lists in that they are heterogeneous sequences of data. The difference is that a tuple is immutable, like a string. As sequences, they can use operation described above:

Tuples are very similar to lists in that they are heterogeneous sequences of data. The difference is that a tuple is immutable, like a string. As sequences, they can use operation described above:

```
In [21]: my_tuple = (2, True, 4.96)
print(my_tuple)
print(len(my_tuple))
print(my_tuple[0])
print(my_tuple * 3)
print(my_tuple[0:2])

my_tuple[1] = False
```

```
(2, True, 4.96)
```

```
3
```

```
2
```

```
(2, True, 4.96, 2, True, 4.96, 2, True, 4.96)
```

```
(2, True)
```

```
-----
-----
TypeError                                Traceback (most recent call
last)
~\AppData\Local\Temp\ipykernel_67152\329028039.py in <module>
      6 print(my_tuple[0:2])
      7
----> 8 my_tuple[1] = False
```

TypeError: 'tuple' object does not support item assignment

```
In [22]: display_quiz(path+"tuple.json", max_width=800)
```

Which of the following statements about lists and tuples in Python are true? (Select all that apply)

Lists have methods like `append()` and `extend()`, while tuples do not support these methods.

The size of a tuple can be changed after it is created.

Tuples are mutable, meaning their elements can be modified after creation.

Both lists and tuples support indexing and slicing operations.

Lists can store elements of different data types.

A `set` is an **unordered collection of zero or more immutable Python data objects**.
`Sets` **do not allow duplicates**. The empty set is represented by `set()`:

A `set` is an **unordered collection of zero or more immutable Python data objects**.
Sets **do not allow duplicates**. The empty set is represented by `set()`:

```
In [23]: my_set = {3, 6, "cat", 4.5, False}
          my_set
```

```
Out[23]: {3, 4.5, 6, False, 'cat'}
```

Even though `sets` are not considered to be sequential, they do support a few of the familiar operations presented earlier.

Even though `sets` are not considered to be sequential, they do support a few of the familiar operations presented earlier.

Operation Name	Operator	Explanation
membership	<code>in</code>	Set membership
length	<code>len</code>	Returns the cardinality of the set
union	<code>a_set other_set</code>	Returns a new set with all elements from both sets
intersection	<code>a_set & other_set</code>	Returns a new set with only those elements common to both sets
difference	<code>a_set - other_set</code>	Returns a new set with all items from the first set not in the second
subset	<code>a_set <= other_set</code>	Asks whether all elements of the first set are in the second

```
In [24]: print(len(my_set))  
         print(False in my_set)  
         print("dog" in my_set)
```

5

True

False

In [27]: `display_quiz(path+"set.json", max_width=800)`

Which of the following sets is equal to the set 's' after executing the following statements? (Remember that sets are unordered.)

```
s = {1, 2, 3, 4}
s.add(5)
s.update([3, 6, 7])
s.remove(4)
```

{1, 2, 3, 4, 5, 6, 7}

{1, 2, 3, 4, 5}

{1, 2, 3, 5, 6, 7}

A KeyError is raised.

Our final `Python` collection is an unordered structure called a `dictionary`. `Dictionaries` are collections of associated pairs of items where each pair consists of a *key* and a *value*. This *key-value* pair is typically written as `key:value`.

Our final `Python` collection is an unordered structure called a `dictionary`. `Dictionaries` are collections of associated pairs of items where each pair consists of a *key* and a *value*. This *key-value* pair is typically written as `key:value`.

```
In [28]: capitals = {"Iowa": "Des Moines", "Wisconsin": "Madison"}  
capitals
```

```
Out[28]: {'Iowa': 'Des Moines', 'Wisconsin': 'Madison'}
```

We can manipulate a `dictionary` by accessing a value via its key or by adding another key-value pair. The syntax for access looks much like a sequence access **except that instead of using the index of the item, we use the key value.**

We can manipulate a `dictionary` by accessing a value via its key or by adding another key-value pair. The syntax for access looks much like a sequence access **except that instead of using the index of the item, we use the key value.**

```
In [29]: capitals = {"Iowa": "Des Moines", "Wisconsin": "Madison"}
print(capitals["Iowa"])
capitals["Utah"] = "Salt Lake City"
print(capitals)
capitals["California"] = "Sacramento"
print(len(capitals))
for k in capitals:
    print(capitals[k], "is the capital of", k)
```

Des Moines

```
{'Iowa': 'Des Moines', 'Wisconsin': 'Madison', 'Utah': 'Salt Lake City'}
```

4

Des Moines is the capital of Iowa

Madison is the capital of Wisconsin

Salt Lake City is the capital of Utah

Sacramento is the capital of California

Dictionaries have both methods and operators. The `keys()`, `values()`, and `items()` methods all return objects that contain the values of interest.

Dictionaries have both methods and operators. The `keys()`, `values()`, and `items()` methods all return objects that contain the values of interest.

Operator	Use	Explanation
<code>[]</code>	<code>a_dict[k]</code>	Returns the value associated with <code>k</code> , otherwise its an error
<code>in</code>	<code>key in a_dict</code>	Returns <code>True</code> if key is in the dictionary, <code>False</code> otherwise
<code>del</code>	<code>del a_dict[key]</code>	Removes the entry from the dictionary

Method Name	Use	Explanation
keys	<code>a_dict.keys()</code>	Returns the keys of the dictionary in a dict_keys object
values	<code>a_dict.values()</code>	Returns the values of the dictionary in a dict_values object
items	<code>a_dict.items()</code>	Returns the key-value pairs in a dict_items object
get	<code>a_dict.get(k)</code>	Returns the value associated with <code>k</code> , <code>None</code> otherwise
get	<code>a_dict.get(k, alt)</code>	Returns the value associated with <code>k</code> , <code>alt</code> otherwise


```
In [30]: phone_ext={"david": 1410, "brad": 1137, "roman": 1171}
print(phone_ext)
print(phone_ext.keys())
print(list(phone_ext.keys()))
print(phone_ext.values())
print(list(phone_ext.values()))
print(phone_ext.items())
print(list(phone_ext.items()))
print(phone_ext.get("kent"))
print(phone_ext.get("kent", "NO ENTRY"))
```

```
{'david': 1410, 'brad': 1137, 'roman': 1171}
dict_keys(['david', 'brad', 'roman'])
['david', 'brad', 'roman']
dict_values([1410, 1137, 1171])
[1410, 1137, 1171]
dict_items([('david', 1410), ('brad', 1137), ('roman', 1171)])
[('david', 1410), ('brad', 1137), ('roman', 1171)]
None
NO ENTRY
```

```
In [31]: display_quiz(path+"dict1.json", max_width=800)
```

What is printed by the following statements?

```
d1 = {"a": 1, "b": 2}  
d2 = d1  
d2["a"] = 99  
print(d1)
```

`{"a": 99, "b": 2, "a": 1}`

An error occurs due to reassignment.

`{"a": 99, "b": 2}`

`{"a": 1, "b": 2}`

In [32]: `display_quiz(path+"get.json", max_width=800)`

What is printed by the following statements?

```
d = {"name": "Alice", "age": 25}
print(d.get("name"))
print(d.get("gender", "Not Specified"))
```

Alice
Not Specified
d

Alice
None

None
Not Specified
d

Error

1.9. Input and Output

Python provides us with a function that allows us to ask a user to enter some data and returns a reference to the data in the form of a string. The function is called input.

Python provides us with a function that allows us to ask a user to enter some data and returns a reference to the data in the form of a string. The function is called input.

Python's function input takes a single parameter that is a string. This string is often called the *prompt* because it contains some helpful text prompting the user to enter something

Python provides us with a function that allows us to ask a user to enter some data and returns a reference to the data in the form of a `string`. The function is called `input`.

Python's function `input` takes a single parameter that is a `string`. This string is often called the *prompt* because it contains some helpful text prompting the user to enter something

```
In [33]: a_name = input("Please enter your name: ")
print("Your name in all capitals is", a_name.upper(),
      "and has length", len(a_name))
```

```
Please enter your name:
Your name in all capitals is  and has length 0
```

It is important to note that the value returned from the input function will be a `string` representing the exact characters that were entered after the prompt. **If you want this `string` interpreted as another type, you must provide the type conversion explicitly.**

It is important to note that the value returned from the input function will be a `string` representing the exact characters that were entered after the prompt. **If you want this string interpreted as another type, you must provide the type conversion explicitly.**

```
In [34]: s_radius = input("Please enter the radius of the circle ")
          print(s_radius)
          radius = float(s_radius)
          print(radius)
          diameter = 2 * radius
          print(diameter)
```

```
Please enter the radius of the circle 3
3
3.0
6.0
```

1.9.1. String Formatting

`print()` takes zero or more parameters and displays them using a single blank as the default separator. It is possible to change the separator character by setting the `sep` argument. In addition, each print ends with a newline character by default. This behavior can be changed by setting the `end` argument.

`print()` takes zero or more parameters and displays them using a single blank as the default separator. It is possible to change the separator character by setting the `sep` argument. In addition, each print ends with a newline character by default. This behavior can be changed by setting the `end` argument.

In [35]:

```
print("Hello")
print("Hello", "World")
print("Hello", "World", sep="***")
print("Hello", "World", end="***")
print("Hello")
```

```
Hello
Hello World
Hello***World
Hello World***Hello
```

It is often useful to have more control over the look of your output. Fortunately, Python provides us with an alternative called formatted strings. A formatted string is a template in which words or spaces that will remain constant are combined with placeholders for variables that will be inserted into the string.

It is often useful to have more control over the look of your output. Fortunately, Python provides us with an alternative called formatted strings. A formatted string is a template in which words or spaces that will remain constant are combined with placeholders for variables that will be inserted into the string.

In [36]:

```
age = 20
print(a_name, "is", age, "years old.")
print("%s is %d years old." % (a_name, age))
```

is 20 years old.

is 20 years old.

It is often useful to have more control over the look of your output. Fortunately, Python provides us with an alternative called formatted strings. A formatted string is a template in which words or spaces that will remain constant are combined with placeholders for variables that will be inserted into the string.

```
In [36]: age = 20
print(a_name, "is", age, "years old.")
print("%s is %d years old." % (a_name, age))
```

```
is 20 years old.
is 20 years old.
```

The `%` operator is a string operator called the format operator. The left side of the expression holds the template or format string, and the right side holds a collection of values that will be substituted into the format string.

The format string may contain one or more conversion specifications. A conversion character tells the format operator what type of value is going to be inserted into that position in the `string`. In the example above, the `%s` specifies a string, while the `%d` specifies an integer.

The format string may contain one or more conversion specifications. A conversion character tells the format operator what type of value is going to be inserted into that position in the `string`. In the example above, the `%s` specifies a string, while the `%d` specifies an integer.

Character	Output Format
<code>d, i</code>	Integer
<code>u</code>	Unsigned integer
<code>f</code>	Floating point as m.ddddd
<code>e</code>	Floating point as m.ddddde+/-xx
<code>E</code>	Floating point as m.dddddE+/-xx
<code>g</code>	Use <code>%e</code> for exponents less than -4 or greater than +5, otherwise use <code>%f</code>
<code>c</code>	Single character
<code>s</code>	String, or any Python data object that can be converted to a string by using the <code>str</code> function
<code>%</code>	Insert a literal <code>%</code> character

Python 3.6 introduced f-strings, a way to use proper variable names instead of placeholders. Formatting conversion symbols can still be used inside an f-string, but the alignment symbols are different from those used with placeholders

Python 3.6 introduced f-strings, a way to use proper variable names instead of placeholders. Formatting conversion symbols can still be used inside an f-string, but the alignment symbols are different from those used with placeholders

Modifier	Example	Description
number	:20d	Put the value in a field width of 20
<	:<20d	Put the value in a field 20 characters wide, left-aligned
>	:>20d	Put the value in a field 20 characters wide, right-aligned
^	:^20d	Put the value in a field 20 characters wide, center-aligned
0	:020d	Put the value in a field 20 characters wide, fill in with leading zeros
.	:20.2f	Put the value in a field 20 characters wide with 2 characters to the right of the decimal point

In [39]:

```
price = 24
item = "banana"
print(f"The {item:10} costs {price:10.2f} cents")
print(f"The {item:<10} costs {price:<10.2f} cents")
print(f"The {item:^10} costs {price:^10.2f} cents")
print(f"The {item:>10} costs {price:>10.2f} cents")
print(f"The {item:>10} costs {price:>010.2f} cents")
itemdict = {"item": "banana", "price": 24}
print(f"Item:{itemdict['item']:.>10}\n" +
      f"Price:{'$':.>4}{itemdict['price']:5.2f}")
```

```
The banana      costs      24.00 cents
The banana      costs 24.00      cents
The   banana    costs   24.00    cents
The      banana costs      24.00 cents
The      banana costs 0000024.00 cents
Item:....banana
Price:...$24.00
```

In [40]: `display_quiz(path+"string2.json", max_width=800)`

What is printed by the following statements?

```
name = "Alice"  
age = 30  
balance = 1234.5678  
print(f"{name} is {age} years old and has a balance of {balance:.2f}")
```

Alice is 30 years old and has a balance of
1234.57

name is 30 years old and has a balance of
1234.57

Alice is {age} years old and has a balance of
{balance:.2f}

Alice is 30 years old and has a balance of
1234.5678

1.10. Control Structures

As we noted earlier, algorithms require two important control structures: iteration and selection. Both of these are supported by Python in various forms. For iteration, Python provides a standard `while` statement and a very powerful `for` statement. The `while` statement repeats a body of code as long as a condition evaluates to `True`:

As we noted earlier, algorithms require two important control structures: iteration and selection. Both of these are supported by Python in various forms. For iteration, Python provides a standard `while` statement and a very powerful `for` statement. The `while` statement repeats a body of code as long as a condition evaluates to `True`:

```
In [41]: counter = 1
         while counter <= 5:
             print("Hello, world")
             counter = counter + 1
```

```
Hello, world
Hello, world
Hello, world
Hello, world
Hello, world
```


As we noted earlier, algorithms require two important control structures: iteration and selection. Both of these are supported by Python in various forms. For iteration, Python provides a standard `while` statement and a very powerful `for` statement. The `while` statement repeats a body of code as long as a condition evaluates to `True`:

```
In [41]: counter = 1
         while counter <= 5:
             print("Hello, world")
             counter = counter + 1
```

```
Hello, world
Hello, world
Hello, world
Hello, world
Hello, world
```

It is easy to see the structure of a Python `while` statement due to the mandatory **indentation** pattern that the language enforces.

Even though this type of construct is very useful in a wide variety of situations, another iterative structure, the `for` statement, can be used in conjunction with many of the `Python` collections. The `for` statement can be used to iterate over the members of a collection, so long as the collection is a sequence.

Even though this type of construct is very useful in a wide variety of situations, another iterative structure, the `for` statement, can be used in conjunction with many of the `Python` collections. The `for` statement can be used to iterate over the members of a collection, so long as the collection is a sequence.

```
In [42]: for item in [1, 3, 6, 2, 5]:  
         print(item)
```

```
1  
3  
6  
2  
5
```

A common use of the for statement is to implement definite iteration over a range of values.

A common use of the for statement is to implement definite iteration over a `range` of values.

```
In [43]: for item in range(5):  
         print(item ** 2)
```

```
0  
1  
4  
9  
16
```

In [45]: `display_quiz(path+"while.json", max_width=800)`

The following code contains an infinite loop. Which is the best explanation for why the loop does not terminate?

```
n = 10
answer = 1
while ( n > 0 ):
    answer = answer + n
    n = n + 1
print(answer)
```

n starts at 10 and is incremented by 1 each time through the loop, so it will always be positive

In the while loop body, we must set n to False, and this code does not do that.

You cannot compare n to 0 in while loop. You must compare it to another variable.

answer starts at 1 and is incremented by n each time, so it will always be positive

In [46]: `display_quiz(path+"for.json", max_width=800)`

How many times is the word HELLO printed by the following statements?

```
s = "python rocks"  
for ch in s:  
    print("HELLO")
```

10

11

12

Error, the for statement needs to use the range() function.

Selection statements allow programmers to ask questions and then, based on the result, perform different actions. Most programming languages provide two versions of this useful construct: the `if...else` and the `if`. A simple example of a binary selection uses the `if...else` statement.

Selection statements allow programmers to ask questions and then, based on the result, perform different actions. Most programming languages provide two versions of this useful construct: the `if...else` and the `if`. A simple example of a binary selection uses the `if...else` statement.

```
In [47]: import math
n = 16
if n < 0:
    print("Sorry, value is negative")
else:
    print(math.sqrt(n))
```

4.0

Selection constructs, as with any control construct, can be nested so that the result of one question helps decide whether to ask the next. For example, assume that `score` is a variable holding a reference to a score for a computer science test.

Selection constructs, as with any control construct, can be nested so that the result of one question helps decide whether to ask the next. For example, assume that `score` is a variable holding a reference to a score for a computer science test.

In [48]:

```
score = 85
if score >= 90:
    print("A")
else:
    if score >= 80:
        print("B")
    else:
        if score >= 70:
            print("C")
        else:
            if score >= 60:
                print("D")
            else:
                print("F")
```

B

An alternative syntax for this type of nested selection uses the `elif` keyword. Note that the final `else` is still necessary to provide the default case if all other conditions fail.

An alternative syntax for this type of nested selection uses the `elif` keyword. Note that the final `else` is still necessary to provide the default case if all other conditions fail.

```
In [49]: if score >= 90:
          print("A")
        elif score >= 80:
          print("B")
        elif score >= 70:
          print("C")
        elif score >= 60:
          print("D")
        else:
          print("F")
```

B

In [50]: `display_quiz(path+"conditions.json", max_width=800)`

What will the following code print if $x = 3$, $y = 5$, and $z = 2$?

```
if x < y and x < z:  
    print("a")  
elif y < x and y < z:  
    print("b")  
else:  
    print("c")
```

b

a

c

Returning to `lists`, there is an alternative method for creating a `list` that uses iteration and selection constructs known as a list comprehension. A list comprehension allows you to easily create a `list` based on some processing or selection criteria.

Returning to `lists`, there is an alternative method for creating a `list` that uses iteration and selection constructs known as a list comprehension. A list comprehension allows you to easily create a `list` based on some processing or selection criteria.

```
In [52]: sq_list = []
         for x in range(1, 11):
             sq_list.append(x * x)

         print(sq_list)

         sq_list=[x * x for x in range(1, 11)]
         sq_list
```

```
[1, 4, 9, 16, 25, 36, 49, 64, 81, 100]
```

```
Out[52]: [1, 4, 9, 16, 25, 36, 49, 64, 81, 100]
```


The general syntax for a list comprehension also allows a selection criteria to be added so that only certain items get added.

The general syntax for a list comprehension also allows a selection criteria to be added so that only certain items get added.

```
In [53]: sq_list=[x * x for x in range(1,11) if x % 2 != 0]  
sq_list
```

```
Out[53]: [1, 9, 25, 49, 81]
```

Exercise: Develop a function `average` that takes a list of integers, `aList`, calculates their average, and prints "pass" or "fail" based on the average being `>=60` or not, respectively. Include the average score rounded to one decimal place in the output.

Exercise: Develop a function `average` that takes a list of integers, `aList`, calculates their average, and prints "pass" or "fail" based on the average being `>=60` or not, respectively. Include the average score rounded to one decimal place in the output.

```
In [ ]: def average(aList):  
        if not aList:  
            print("List is empty")  
            return  
        #Your code here, calculate average and store into variable avg  
  
        # Determine status and print formatted results and store into variable status  
  
        print(f"{} (Average: {})"
```

Exercise: Develop a function `average` that takes a list of integers, `aList`, calculates their average, and prints "pass" or "fail" based on the average being `>=60` or not, respectively. Include the average score rounded to one decimal place in the output.

```
In [ ]: def average(aList):  
        if not aList:  
            print("List is empty")  
            return  
        #Your code here, calculate average and store into variable avg  
  
        # Determine status and print formatted results and store into variable status  
  
        print(f"{} (Average: {})")
```

```
In [ ]: average([99, 100, 74, 63, 100, 100])  
average([22, 19, 74, 63, 100, 44])
```

1.11. Exception Handling

There are two types of errors that typically occur when writing programs. The first, known as a syntax error, simply means that the programmer has made a mistake in the structure of a statement or expression.

There are two types of errors that typically occur when writing programs. The first, known as a syntax error, simply means that the programmer has made a mistake in the structure of a statement or expression.

```
In [54]: for i in range(10)
```

```
File "C:\Users\adm\AppData\Local\Temp\ipykernel_67152\1522442676.py", line 1
    for i in range(10)
                    ^
SyntaxError: invalid syntax
```


The other type of error, known as a logic error, denotes a situation where the program executes but gives the wrong result. This can be due to an error in the underlying algorithm or an error in your translation of that algorithm.

The other type of error, known as a logic error, denotes a situation where the program executes but gives the wrong result. This can be due to an error in the underlying algorithm or an error in your translation of that algorithm.

In some cases, logic errors lead to very bad situations such as trying to divide by zero or trying to access an item in a list where the index of the item is outside the bounds of the list. In this case, the logic error leads to a runtime error that causes the program to terminate! These types of runtime errors are typically called exceptions.

Most programming languages provide a way to deal with these errors that will allow the programmer to have some type of intervention if they so choose. In addition, programmers can create their own exceptions if they detect a situation in the program execution that warrants it.

Most programming languages provide a way to deal with these errors that will allow the programmer to have some type of intervention if they so choose. In addition, programmers can create their own exceptions if they detect a situation in the program execution that warrants it.

When an exception occurs, we say that it has been *raised*. You can *handle* the exception that has been raised by using a `try` statement.

Most programming languages provide a way to deal with these errors that will allow the programmer to have some type of intervention if they so choose. In addition, programmers can create their own exceptions if they detect a situation in the program execution that warrants it.

When an exception occurs, we say that it has been *raised*. You can *handle* the exception that has been raised by using a `try` statement.

```
In [55]: import math
a_number = int(input("Please enter an integer "))
print(math.sqrt(a_number))
```

Please enter an integer -5

```
-----
-----
ValueError                                Traceback (most recent call
last)
~\AppData\Local\Temp\ipykernel_67152\131839230.py in <module>
      1 import math
      2 a_number = int(input("Please enter an integer "))
----> 3 print(math.sqrt(a_number))

ValueError: math domain error
```

We can handle this exception by calling the print function from within a `try` block. A corresponding `except` block "catches" the exception and prints a message back to the user in the event that an exception occurs.

We can handle this exception by calling the print function from within a `try` block. A corresponding `except` block "catches" the exception and prints a message back to the user in the event that an exception occurs.

```
In [56]: try:
          a_number = int(input("Please enter an integer "))
          print(math.sqrt(a_number))
        except:
          print("Bad value for the square root function")
          print("Using the absolute value instead")
          print(math.sqrt(abs(a_number)))
```

```
Please enter an integer -5
Bad value for the square root function
Using the absolute value instead
2.23606797749979
```

It is also possible for a programmer to cause a runtime exception by using the `raise` statement. For example, instead of calling the square root function with a negative number, we could have checked the value first and then raised our own exception!

It is also possible for a programmer to cause a runtime exception by using the `raise` statement. For example, instead of calling the square root function with a negative number, we could have checked the value first and then raised our own exception!

```
In [57]: if a_number < 0:
          raise RuntimeError("You can't use a negative number")
        else:
          print(math.sqrt(a_number))
```

```
-----
-----
RuntimeError                                Traceback (most recent call
last)
~\AppData\Local\Temp\ipykernel_67152\1609119426.py in <module>
      1 if a_number < 0:
----> 2     raise RuntimeError("You can't use a negative number")
      3 else:
      4     print(math.sqrt(a_number))

RuntimeError: You can't use a negative number
```

In [58]: `display_quiz(path+"exception.json", max_width=800)`

What is printed by the following statements?

```
try:
    x = int("abc")
    print("Conversion succeeded")
except ValueError:
    print("Conversion failed")
else:
    print("No exception occurred")
finally:
    print("Execution finished")
```

Conversion failed
No exception occurred
Execution finished

Conversion succeeded
No exception occurred
Execution finished

Conversion succeeded
Execution finished

Conversion failed
Execution finished

1.12. Defining Functions

The earlier example of procedural abstraction called upon a `Python` function called `sqrt()` from the `math` module to compute the square root. In general, we can hide the details of any computation by defining a function. A function definition requires a **name**, **a group of parameters, and a body**. **It may also explicitly return a value.**

The earlier example of procedural abstraction called upon a `Python` function called `sqrt()` from the `math` module to compute the square root. In general, we can hide the details of any computation by defining a function. A function definition requires a **name**, **a group of parameters**, and **a body**. It may also explicitly return a value.

```
In [59]: def square(n):  
         return n ** 2  
  
         print(square(3))  
  
         square(square(3))
```

9

Out[59]: 81

```
In [60]: display_quiz(path+"func4.json", max_width=800)
```

What is wrong with the following function definition if we would like to receive the summation from the function

```
def add_em(x, y, z):  
    print(x+y+z)
```

The value of x+y+z

The value None

The string 'x+y+z'

1.13. Object-Oriented Programming in Python: Defining Classes

One of the most powerful features in an object-oriented programming language is the ability to allow a programmer (problem solver) to create new classes that model data that is needed to solve the problem.

One of the most powerful features in an object-oriented programming language is the ability to allow a programmer (problem solver) to create new classes that model data that is needed to solve the problem.

Remember that we use abstract data types to provide the logical description of what a data object looks like (its state) and what it can do (its methods).

1.13.1. A Fraction Class

A very common example to show the details of implementing a user-defined class is to construct a class to implement the abstract data type `Fraction`. Although it is possible to create a floating point approximation for any fraction, in this case we would like to represent the fraction as an exact value.

A very common example to show the details of implementing a user-defined class is to construct a class to implement the abstract data type `Fraction`. Although it is possible to create a floating point approximation for any fraction, in this case we would like to represent the fraction as an exact value.

The operations for the `Fraction` type will allow a `Fraction` data object to behave like any other numeric value. We need to be able to add, subtract, multiply, and divide fractions.

A very common example to show the details of implementing a user-defined class is to construct a class to implement the abstract data type `Fraction`. Although it is possible to create a floating point approximation for any fraction, in this case we would like to represent the fraction as an exact value.

The operations for the `Fraction` type will allow a `Fraction` data object to behave like any other numeric value. We need to be able to add, subtract, multiply, and divide fractions.

We also want to be able to show fractions using the standard "slash" form, for example `3/5`. In addition, all fraction methods should return results in their lowest terms so that no matter what computation is performed, we always end up with the most common form.

In `Python`, we define a new class by providing a name and a set of method definitions that are syntactically similar to function definitions. The first method that all classes should provide is the constructor. The constructor defines the way in which data objects are created.

In `Python`, we define a new class by providing a name and a set of method definitions that are syntactically similar to function definitions. The first method that all classes should provide is the constructor. The constructor defines the way in which data objects are created.

```
In [61]: class Fraction:
          """Class Fraction"""
          def __init__(self, top, bottom):
              """Constructor definition"""
              self.num = top
              self.den = bottom
```

In `Python`, we define a new class by providing a name and a set of method definitions that are syntactically similar to function definitions. The first method that all classes should provide is the constructor. The constructor defines the way in which data objects are created.

```
In [61]: class Fraction:
          """Class Fraction"""
          def __init__(self, top, bottom):
              """Constructor definition"""
              self.num = top
              self.den = bottom
```

`self` is a special parameter that will always be used as a reference back to the object itself. It must always be the first formal parameter.


To create an instance of the `Fraction` class, we must invoke the constructor.

To create an instance of the `Fraction` class, we must invoke the constructor.

```
In [62]: my_fraction = Fraction(3, 5)
```

To create an instance of the `Fraction` class, we must invoke the constructor.

```
In [62]: my_fraction = Fraction(3, 5)
```

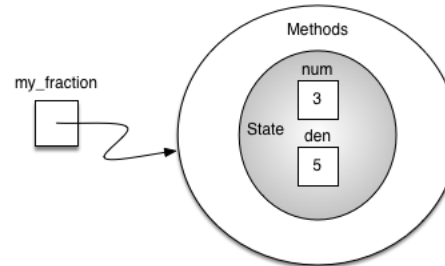

Abstraction and Encapsulation

Since we are using classes to create abstract data types, we should probably discuss the meaning of the word "abstract" in this context. Abstraction in object-oriented programming requires **you to focus only on the desired properties and behaviors of the objects and discard what is unimportant or irrelevant.**

Since we are using classes to create abstract data types, we should probably discuss the meaning of the word "abstract" in this context. Abstraction in object-oriented programming requires **you to focus only on the desired properties and behaviors of the objects and discard what is unimportant or irrelevant.**

It is used in a situation where software programmers want to develop similar objects without having to redefine the most similar properties.

The object-oriented principle of encapsulation is the notion that we should hide the contents of a class, except what is absolutely necessary to expose. Hence, we will restrict the access to our class as much as we can, so that a user can change the class properties and behaviors only from methods provided by the class.

The object-oriented principle of encapsulation is the notion that we should hide the contents of a class, except what is absolutely necessary to expose. Hence, we will restrict the access to our class as much as we can, so that a user can change the class properties and behaviors only from methods provided by the class.

Python does not have private data. Instead, you use naming conventions to design classes that encourage correct use. By convention, Python programmers know that any attribute name beginning with an underscore (`_`) is for a class's internal use only. Code should use the class's methods to interact with each object's internal-use data attributes.

Attributes whose identifiers do not begin with an underscore (`_`) are considered publicly accessible.

Attributes whose identifiers do not begin with an underscore (`_`) are considered publicly accessible.

```
In [63]: class Fraction:
          """Class Fraction"""
          def __init__(self, top, bottom):
              """Constructor definition"""
              self.__num = top
              self.__den = bottom
          def get_num(self):
              return self.__num
a = Fraction(3,5)
a.__num = 4
a.get_num()
```

Out[63]: 3

Polymorphism

Polymorphism means the ability to appear in many forms. In OOP, polymorphism refers to the ability to process objects or methods differently depending on their data type, class, number of arguments, etc. For example, we can overload a constructor with different numbers and types of arguments to give us more optional ways to instantiate an object of the class in question.

Polymorphism means the ability to appear in many forms. In OOP, polymorphism refers to the ability to process objects or methods differently depending on their data type, class, number of arguments, etc. For example, we can overload a constructor with different numbers and types of arguments to give us more optional ways to instantiate an object of the class in question.

In this case, we can use class methods which are associated with a class rather than individual objects like regular methods are. You can recognize a class method in code when you see two markers: the `@classmethod` decorator before the method's `def` statement and the use of `cls` as the first parameter.

We can then provide alternative constructor methods besides `__init__()` to implement polymorphism. Here, we can add additional constructors to handle fractions that are whole numbers and instances with no parameters given:

We can then provide alternative constructor methods besides `__init__()` to implement polymorphism. Here, we can add additional constructors to handle fractions that are whole numbers and instances with no parameters given:

```
In [89]: class Fraction:
          """Class Fraction"""
          def __init__(self, top, bottom):
              """Constructor definition"""
              self._num = top
              self._den = bottom
          @classmethod
          def fromTop(cls, top):
              return Fraction(top, 1)
          def fromVoid(cls):
              return Fraction(0, 1)
```

The `cls` parameter acts like `self` except `self` refers to an object, but the `cls` parameter refers to an object's class. This means that the code in a class method cannot access an individual object's attributes or call an object's regular methods. Class methods can only call other class methods or access class attributes.

The `cls` parameter acts like `self` except `self` refers to an object, but the `cls` parameter refers to an object's class. This means that the code in a class method cannot access an individual object's attributes or call an object's regular methods. Class methods can only call other class methods or access class attributes.

Calling the constructor with two arguments will invoke the first method, calling it with a single argument will invoke the second method, and calling it with no arguments will invoke the third method.

Using optional parameters will accomplish the same task in this case. Since the class will behave the same no matter which implementation you use and the user will have no idea which implementation was chosen, this is an example of encapsulation.

Using optional parameters will accomplish the same task in this case. Since the class will behave the same no matter which implementation you use and the user will have no idea which implementation was chosen, this is an example of encapsulation.

```
In [65]: class Fraction:
          """Class Fraction"""
          def __init__(self, top=0, bottom=1):
              """Constructor definition"""
              self._num = top
              self._den = bottom
```

Operator overloading

The next thing we need to do is implement the behavior that the abstract data type requires. To begin, consider what happens when we try to print a `Fraction` object.

The next thing we need to do is implement the behavior that the abstract data type requires. To begin, consider what happens when we try to print a `Fraction` object.

```
In [66]: my_fraction = Fraction(3, 5)  
         print(my_fraction)
```

```
<__main__.Fraction object at 0x000001B9BA592D60>
```

The next thing we need to do is implement the behavior that the abstract data type requires. To begin, consider what happens when we try to print a `Fraction` object.

```
In [66]: my_fraction = Fraction(3, 5)
         print(my_fraction)
```

```
<__main__.Fraction object at 0x000001B9BA592D60>
```

The print function requires that the object convert itself into a string so that the string can be written to the output. This is not what we want. In `Python`, all classes have a set of standard methods that are provided but may not work properly. One of these, `__str__`, is the method to convert an object into a `string`.

What we need to do is provide a better implementation for this method. We will say that this implementation overrides the previous one, or that it redefines the method's behavior.

What we need to do is provide a better implementation for this method. We will say that this implementation overrides the previous one, or that it redefines the method's behavior.

```
In [67]: class Fraction:
          """Class Fraction"""
          def __init__(self, top, bottom):
              """Constructor definition"""
              self._num = top
              self._den = bottom
          def __str__(self):
              return f"{self._num}/{self._den}"

          my_fraction = Fraction(3, 5)
          print(my_fraction)
          print(f"I ate {my_fraction} of pizza")
          str(my_fraction)
```

3/5

I ate 3/5 of pizza

Out[67]: '3/5'

We can override many other methods for our new `Fraction` class. Some of the most important of these are the basic arithmetic operations.

We can override many other methods for our new `Fraction` class. Some of the most important of these are the basic arithmetic operations.

In [68]:

```
f1 = Fraction(1, 4)
f2 = Fraction(1, 2)
f1 + f2
```


TypeError

Traceback (most recent call

last)

~\AppData\Local\Temp\ipykernel_67152\3976513727.py in <module>

1 f1 = Fraction(1, 4)

2 f2 = Fraction(1, 2)

----> 3 f1 + f2

TypeError: unsupported operand type(s) for +: 'Fraction' and 'Fraction'

We can override many other methods for our new `Fraction` class. Some of the most important of these are the basic arithmetic operations.

In [68]:

```
f1 = Fraction(1, 4)
f2 = Fraction(1, 2)
f1 + f2
```


TypeError

Traceback (most recent call

last)

~\AppData\Local\Temp\ipykernel_67152\3976513727.py in <module>

1 f1 = Fraction(1, 4)

2 f2 = Fraction(1, 2)

----> 3 f1 + f2

TypeError: unsupported operand type(s) for +: 'Fraction' and 'Fraction'

We can fix this by providing the `Fraction` class with a method that overrides the addition method. In `Python`, this method is called `__add__` and it requires two parameters. The first, `self`, is always needed, and the second represents the other operand in the expression.

In [69]:


```
def gcd(m, n):
    while m % n != 0:
        m, n = n, m % n
    return n


class Fraction:
    """Class Fraction"""
    def __init__(self, top, bottom):
        """Constructor definition"""
        self._num = top
        self._den = bottom
    def __str__(self):
        return f"{self._num}/{self._den}"
    def __add__(self, other_fraction):
        new_num = self._num * other_fraction._den + \
            self._den * other_fraction._num
        new_den = self._den * other_fraction._den
        common = gcd(new_num, new_den)
        return Fraction(new_num // common, new_den // common)

f1 = Fraction(1, 4)
f2 = Fraction(1, 2)
print(f1 + f2)
f3 = f1
f3, f1
```

3/4

Out[69]: (<__main__.Fraction at 0x1b9ba4977c0>, <__main__.Fraction at 0x1b9ba4977c0>)

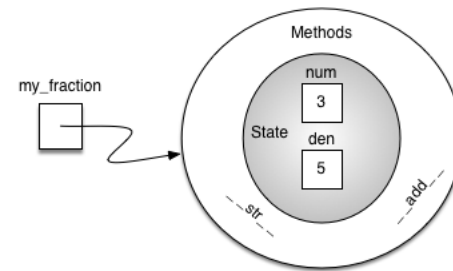


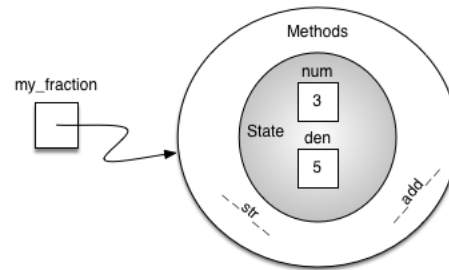

An additional group of methods that we need to include in our example `Fraction` class will allow two fractions to compare themselves to one another. Assume we have two `Fraction` objects, `f1` and `f2`. `f1==f2` will only be `True` if they are references to the same object.


Two different objects with the same numerators and denominators would not be equal under this implementation. This is called shallow equality.

Two different objects with the same numerators and denominators would not be equal under this implementation. This is called shallow equality.

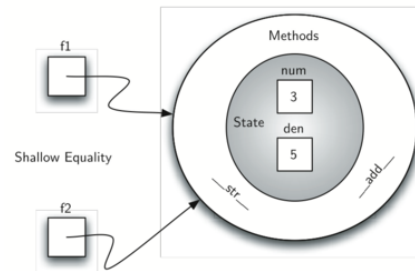

We can create deep equality—equality by the same value, not the same reference—by overriding the `__eq__` method

We can create deep equality—equality by the same value, not the same reference—by overriding the `__eq__` method

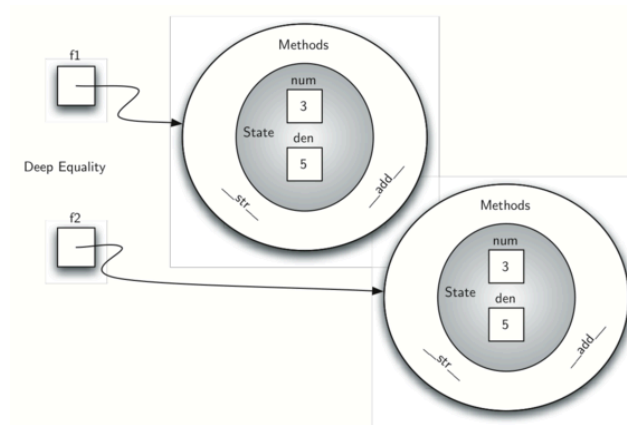

In [70]:

```
def gcd(m, n):
    while m % n != 0:
        m, n = n, m % n
    return n

class Fraction:
    def __init__(self, top, bottom):
        self._num = top
        self._den = bottom

    def __str__(self):
        return "{:d}/{:d}".format(self._num, self._den)

    def __eq__(self, other_fraction):
        first_num = self._num * other_fraction._den
        second_num = other_fraction._num * self._den

        return first_num == second_num

    def __add__(self, other_fraction):
        new_num = self._num * other_fraction._den \
            + self._den * other_fraction._num
        new_den = self._den * other_fraction._den
        cmmn = gcd(new_num, new_den)
        return Fraction(new_num // cmmn, new_den // cmmn)
```

```
In [71]: x = Fraction(1, 2)
y = Fraction(2, 3)
print(y)
print(x + y)
print(x == y)
```

2/3

7/6

False

Exercise: Implement the remaining relational operators `__gt__`, `__lt__`. In the definition of fractions we assumed that negative fractions have a negative numerator and a positive denominator. Using a negative denominator would cause some of the relational operators to give incorrect results. In general, this is an unnecessary constraint. Modify the constructor to allow the user to pass a negative denominator so that all of the operators continue to work properly.

Exercise: Implement the remaining relational operators `__gt__`, `__lt__`. In the definition of fractions we assumed that negative fractions have a negative numerator and a positive denominator. Using a negative denominator would cause some of the relational operators to give incorrect results. In general, this is an unnecessary constraint. Modify the constructor to allow the user to pass a negative denominator so that all of the operators continue to work properly.


In []: *## Your code here*

```
In [ ]: a = Fraction(3,5)
        b = Fraction(-9,10)
        a > b
```



1.13.2. Inheritance: Logic Gates and Circuits

Inheritance is the ability of one class to be related to another class. Children inherit characteristics from their parents. Similarly, Python *child classes* can inherit characteristic data and behavior from a *parent class*. These classes are often referred to as subclasses and superclasses.

Inheritance is the ability of one class to be related to another class. Children inherit characteristics from their parents. Similarly, `Python` *child classes* can inherit characteristic data and behavior from a *parent class*. These classes are often referred to as subclasses and superclasses.

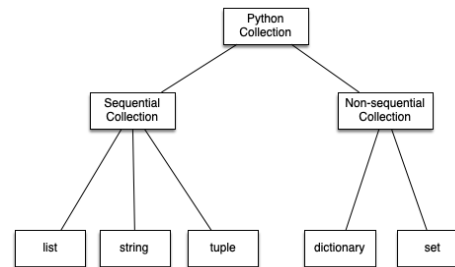

Inheritance is the ability of one class to be related to another class. Children inherit characteristics from their parents. Similarly, `Python` *child classes* can inherit characteristic data and behavior from a *parent class*. These classes are often referred to as subclasses and superclasses.

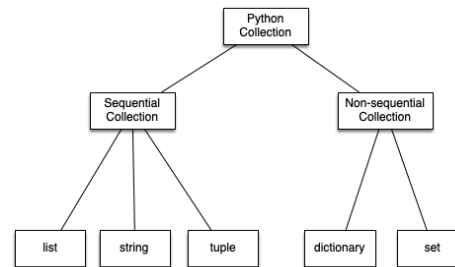

For example, the `list` is a child of the `sequential collection`. In this case, we call the `list` the child and the sequence the parent (or subclass list and superclass sequence). This is often referred to as an **Is-a** relationship (the list Is-a sequential collection).

`Lists`, `tuples`, and `strings` are all examples of sequential collections. They all inherit common data organization and operations. However, each of them is distinct based on whether the data is homogeneous and whether the collection is immutable. The children all gain from their parents but distinguish themselves **by adding additional characteristics**.

`Lists`, `tuples`, and `strings` are all examples of sequential collections. They all inherit common data organization and operations. However, each of them is distinct based on whether the data is homogeneous and whether the collection is immutable. The children all gain from their parents but distinguish themselves **by adding additional characteristics**.

By organizing classes in this hierarchical fashion, object-oriented programming languages allow previously written code to be extended to meet the needs of a new situation.

`Lists`, `tuples`, and `strings` are all examples of sequential collections. They all inherit common data organization and operations. However, each of them is distinct based on whether the data is homogeneous and whether the collection is immutable. The children all gain from their parents but distinguish themselves **by adding additional characteristics**.


By organizing classes in this hierarchical fashion, object-oriented programming languages allow previously written code to be extended to meet the needs of a new situation.

To explore this idea further, we will construct a simulation, an application to simulate digital circuits. The basic building block for this simulation will be the logic gate. These electronic switches represent Boolean algebra relationships between their input and their output.




and

	0	1
0	0	0
1	0	1






or

	0	1
0	0	1
1	1	1




not


0	1
1	0

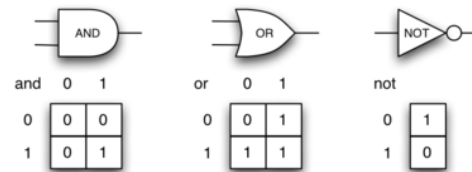

In order to implement a circuit, we will first build a representation for logic gates. Logic gates are easily organized into a class inheritance hierarchy:

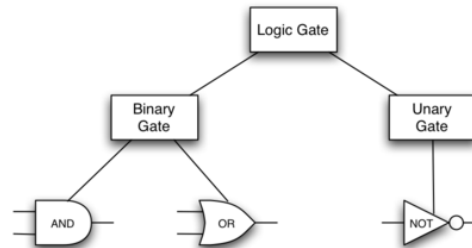

In order to implement a circuit, we will first build a representation for logic gates. Logic gates are easily organized into a class inheritance hierarchy:

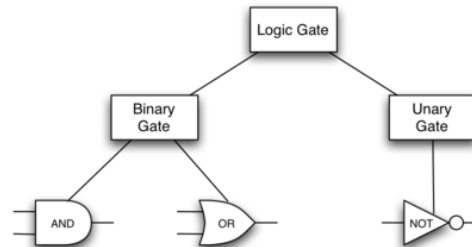

We can now start to implement the classes by starting with the most general, `LogicGate`. As noted earlier, each gate has a label for identification and a single output line. In addition, we need methods to allow a user of a gate to ask the gate for its label.

```
In [72]: class LogicGate:
    def __init__(self, lbl):
        self._label = lbl
        self._output = None

    def get_label(self):
        return self._label

    def get_output(self):
        self._output = self.perform_gate_logic()
        return self._output
```

```
In [72]: class LogicGate:
    def __init__(self, lbl):
        self._label = lbl
        self._output = None

    def get_label(self):
        return self._label

    def get_output(self):
        self._output = self.perform_gate_logic()
        return self._output
```

At this point, we will not implement the `perform_gate_logic()`. The reason for this is that we do not know how each gate will perform its own logic operation. Those details will be included by each individual gate that is added to the hierarchy.

```
In [72]: class LogicGate:
    def __init__(self, lbl):
        self._label = lbl
        self._output = None

    def get_label(self):
        return self._label

    def get_output(self):
        self._output = self.perform_gate_logic()
        return self._output
```

At this point, we will not implement the `perform_gate_logic()`. The reason for this is that we do not know how each gate will perform its own logic operation. Those details will be included by each individual gate that is added to the hierarchy.

Any new logic gate that gets added to the hierarchy will simply need to implement the `perform_gate_logic()` and it will be used at the appropriate time. Once done, the gate can provide its output value.

In [73]:

```
class BinaryGate(LogicGate):
    def __init__(self, lbl):
        LogicGate.__init__(self, lbl) # super().__init__(lbl)
        self._pin_a = None
        self._pin_b = None

    def get_pin_a(self):
        if self._pin_a == None:
            return int(input("Enter pin A input for gate " + self.get_label()))
        else:
            return self._pin_a.get_from().get_output()
    def get_pin_b(self):
        if self._pin_b == None:
            return int(input("Enter pin B input for gate " + self.get_label()))
        else:
            return self._pin_b.get_from().get_output()

    def set_from_pin(self, source):
        if self._pin_a == None:
            self._pin_a = source
        else:
            if self._pin_b == None:
                self._pin_b = source
            else:
                raise RuntimeError("Error: NO EMPTY PINS")
```

```
In [73]: class BinaryGate(LogicGate):
    def __init__(self, lbl):
        LogicGate.__init__(self, lbl) # super().__init__(lbl)
        self._pin_a = None
        self._pin_b = None

    def get_pin_a(self):
        if self._pin_a == None:
            return int(input("Enter pin A input for gate " + self.get_label()))
        else:
            return self._pin_a.get_from().get_output()
    def get_pin_b(self):
        if self._pin_b == None:
            return int(input("Enter pin B input for gate " + self.get_label()))
        else:
            return self._pin_b.get_from().get_output()

    def set_from_pin(self, source):
        if self._pin_a == None:
            self._pin_a = source
        else:
            if self._pin_b == None:
                self._pin_b = source
            else:
                raise RuntimeError("Error: NO EMPTY PINS")
```

The call to `set_from_pin()` is very important for making connections.


```
In [74]: class UnaryGate(LogicGate):

    def __init__(self, lbl):
        LogicGate.__init__(self, lbl)

        self._pin = None

    def get_pin(self):
        if self._pin == None:
            return int(input("Enter pin input for gate " + self.get_label() +
else:
            return self._pin.get_from().get_output())

    def set_from_pin(self, source):
        if self._pin == None:
            self._pin = source
        else:
            print("Cannot Connect: NO EMPTY PINS on this gate")
```

```
In [74]: class UnaryGate(LogicGate):

    def __init__(self, lbl):
        LogicGate.__init__(self, lbl)

        self._pin = None

    def get_pin(self):
        if self._pin == None:
            return int(input("Enter pin input for gate " + self.get_label() +
else:
            return self._pin.get_from().get_output())

    def set_from_pin(self, source):
        if self._pin == None:
            self._pin = source
        else:
            print("Cannot Connect: NO EMPTY PINS on this gate")
```

The constructors in both of these classes start with an explicit call to the constructor of the parent class using the parent's `__init__` method. The constructor then goes on to add the two input lines (`pin_a` and `pin_b`).

Now that we have a general class for gates depending on the number of input lines, we can build specific gates that have unique behavior. For example, the `AndGate` class will be a subclass of `BinaryGate` since AND gates have two input lines

Now that we have a general class for gates depending on the number of input lines, we can build specific gates that have unique behavior. For example, the `AndGate` class will be a subclass of `BinaryGate` since AND gates have two input lines

```
In [76]: class AndGate(BinaryGate):
        def __init__(self, lbl):
            super().__init__(lbl)

        def perform_gate_logic(self):
            a = self.get_pin_a()
            b = self.get_pin_b()
            if a == 1 and b == 1:
                return 1
            else:
                return 0

        g1 = AndGate("G1")
        g1.get_output()
```

```
Enter pin A input for gate G1: 0
Enter pin B input for gate G1: 1
```

```
Out[76]: 0
```

The same development can be done for OR gates and NOT gates:

The same development can be done for OR gates and NOT gates:

```
In [77]: class OrGate(BinaryGate):

    def __init__(self, lbl):
        BinaryGate.__init__(self, lbl)

    def perform_gate_logic(self):

        a = self.get_pin_a()
        b = self.get_pin_b()
        if a == 1 or b == 1:
            return 1
        else:
            return 0

class NotGate(UnaryGate):

    def __init__(self, lbl):
        UnaryGate.__init__(self, lbl)

    def perform_gate_logic(self):
        if self.get_pin():
            return 0
        else:
            return 1
```


```
In [78]: g2 = OrGate("G2")  
print(g2.get_output())
```

```
g3 = NotGate("G3")  
g3.get_output()
```


```
Enter pin A input for gate G2: 1  
Enter pin B input for gate G2: 0  
1  
Enter pin input for gate G3: 1
```

```
Out[78]: 0
```

Now that we have the basic gates working, we can turn our attention to building circuits. In order to create a circuit, we need to connect gates together, the output of one flowing into the input of another. To do this, we will implement a new class called `Connector`.



Now that we have the basic gates working, we can turn our attention to building circuits. In order to create a circuit, we need to connect gates together, the output of one flowing into the input of another. To do this, we will implement a new class called `Connector`.



The `Connector` class will not reside in the gate hierarchy. It will, however, use the gate hierarchy in that each connector will have two gates, one on either end. This relationship is very important in object-oriented programming. It is called the **Has-a relationship**.


Now, with the `Connector` class, we say that a `Connector` Has-a `LogicGate`, meaning that connectors will have instances of the `LogicGate` class within them but are not part of the hierarchy.

Now, with the `Connector` class, we say that a `Connector` Has-a `LogicGate`, meaning that connectors will have instances of the `LogicGate` class within them but are not part of the hierarchy.

```
In [79]: class Connector:
          def __init__(self, fgate, tgate):
              self.from_gate = fgate
              self.to_gate = tgate

              tgate.set_from_pin(self)

          def get_from(self):
              return self.from_gate
```

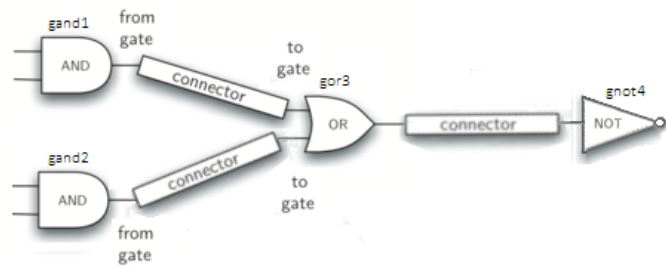

In [80]:

```
g1 = AndGate("gand1")
g2 = AndGate("gand2")
g3 = OrGate("gor3")
g4 = NotGate("gnot4")
c1 = Connector(g1, g3)
c2 = Connector(g2, g3)
c3 = Connector(g3, g4)
g4.get_output()
```

```
Enter pin A input for gate gand1: 0
Enter pin B input for gate gand1: 1
Enter pin A input for gate gand2: 0
Enter pin B input for gate gand2: 1
```

Out[80]: 1

In [81]: `display_quiz(path+"create_class.json", max_width=800)`

What is printed by the following code?

```
class Car:
    def __init__(self, brand, year):
        self.brand = brand
        self.year = year
    def get_info(self):
        return f"{self.brand} - {self.year}"

my_car = Car("Toyota", 2020)
print(my_car.get_info())
```

Toyota - 2020

Toyota

Error: __init__ missing required arguments

Car - 2020

```
In [82]: display_quiz(path+"string_class.json", max_width=800)
```

What is printed by the following code?

```
class Person:
    def __init__(self, name, age):
        self.name = name
        self.age = age
    def __repr__(self):
        return f"Person('{self.name}', {self.age})"
    def __str__(self):
        return f"{self.name} ({self.age} years old)"

p = Person("Bob", 25)
print(repr(p))
print(p)
```

```
Bob (25 years old)
Bob (25 years old)
```

```
Person('Bob', 25)
Bob (25 years old)
```

```
Person('Bob', 25)
Person('Bob', 25)
```

```
Bob (25 years old)
Person('Bob', 25)
```

In [83]: `display_quiz(path+"inheritance.json", max_width=800)`

What is printed by the following statements?

```
class Engine:
    def start(self):
        return "Engine started"

class Car:
    def __init__(self):
        self.engine = Engine() # Composition: Car has an Engine
    def start(self):
        return self.engine.start()

class ElectricCar(Car): # Inheritance: ElectricCar inherits from Car
    def start(self):
        return "ElectricCar ready"

car = Car()
electric_car = ElectricCar()
print(car.start())
print(electric_car.start())
```

```
Engine starte
d
Engine starte
d
```

```
Engine started
ElectricCar read
y
```



```
ElectricCar read  
Y  
ElectricCar read  
Y
```

```
ElectricCar read  
Y  
Engine started
```

In [84]: `display_quiz(path+"encapsulation.json", max_width=800)`

What is printed by the following code?

```
class Person:
    def __init__(self, name):
        self.__name = name # private attribute

    def get_name(self):
        return self.__name

p = Person("Alice")
print(p.get_name())
print(p.__name)
```

AttributeError
r
AttributeError
r

Alice
Alice

Alice
AttributeError
r

Alice
None

In [85]: `display_quiz(path+"poly.json", max_width=800)`

What is printed by the following code?

```
class Shape:
    def area(self):
        return "No area"

class Circle(Shape):
    def __init__(self, radius):
        self.radius = radius
    def area(self):
        return 3.14 * self.radius * self.radius

class Square(Shape):
    def __init__(self, side):
        self.side = side
    def area(self):
        return self.side * self.side

shapes = [Circle(2), Square(3)]
for shape in shapes:
    print(shape.area())
```

12.56 9

No area
No area

12.56
9

9
12.56

```
In [88]: from jupytercards import display_flashcards  
fpath= "https://raw.githubusercontent.com/phonchi/nsysu-math208/refs/heads/main/  
display_flashcards(fpath + 'ch1.json')
```

Algorithm

Next

>

References

1. Textbook Ch1

